




AE8

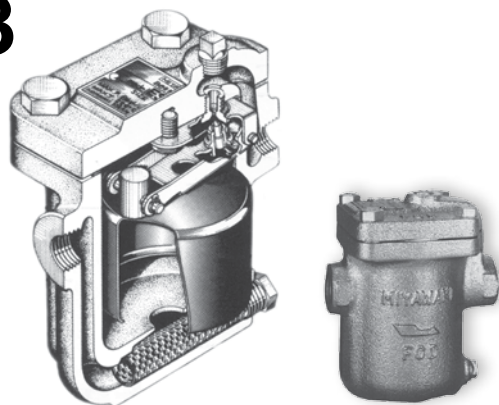


AV

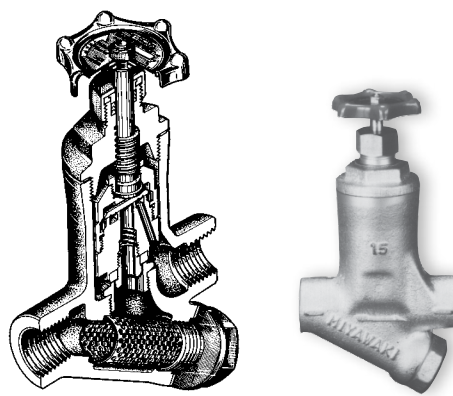

Capacity Chart AE8

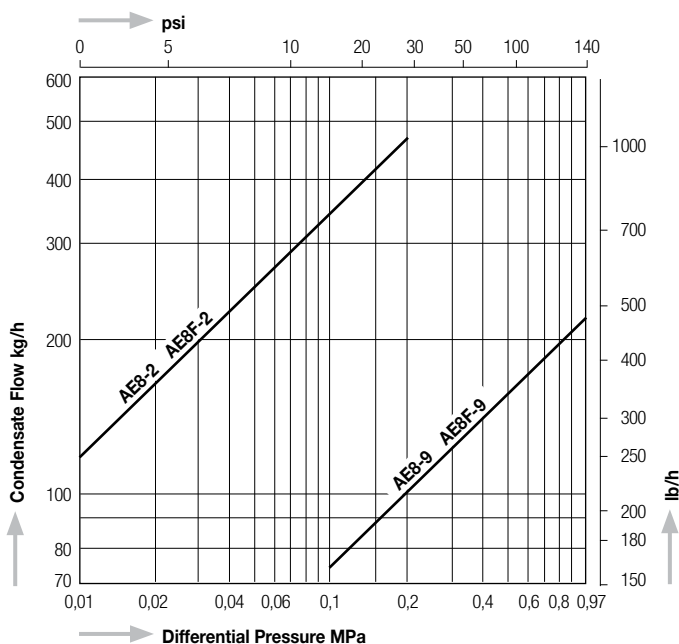


Capacity Chart AV

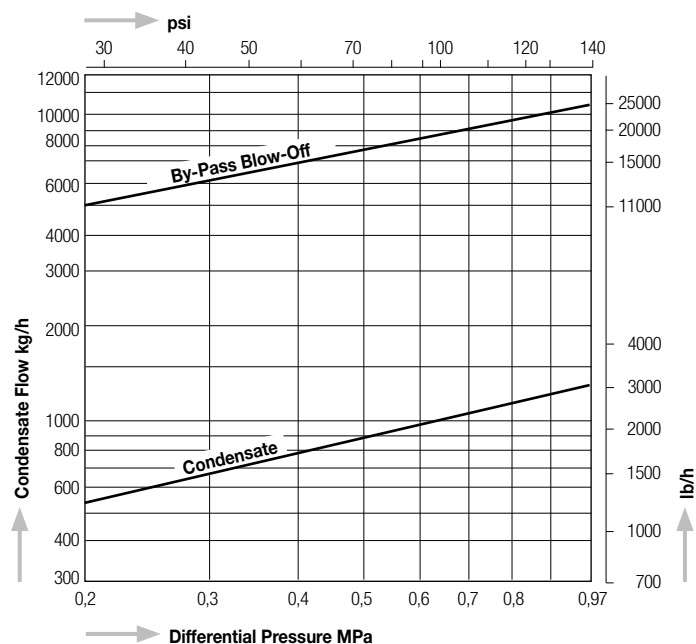


Dimensions


AE8



AE8F

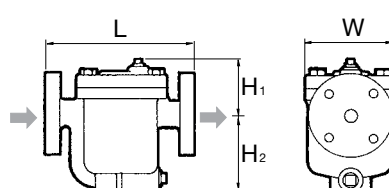

AV



Model	Connections	Size (in)	Max. Operating Pressure		Max. Operating Temperature		Dimensions (mm)				Dimensions (in)				Body Material	Weight		
			MPa	psig	°C	°F	L	H1	H2	W	L	H1	H2	W		kg	lb	
AE8-	2 — 9	Screwed Rc, NPT	½"	0,01 – 0,2	1.5 – 29	350	662	130	73	90	100	5.1	2.9	3.5	3.9	Ductile Cast Iron FCD450	3,7	8.1
			¾"					5.3				3,9					8.6	
			1"					0,1 – 0,97	1.5 – 140	130	73	90	100	5.1	2.9		3.5	3.9
			½"	5.3	3,9					8.6								
			¾"	0,01 – 0,2	1.5 – 29					195	68	95	100	7.7	2.7		3.7	3.9
			1"					8.5	6,8	15.0								
AE8F-	2 — 9	Flanged JIS, ASME, DIN	½"	0,01 – 0,2	1.5 – 29	350	662	175	73	90	100	6.9	2.9	3.5	3.9	5,3	11.7	
			¾"					7.7	2.7	3.7		5,7	12.5					
			1"					215	68	95	100	8.5	2.7	3.7	3.9	6,8	15.0	
			½"	175	73			90				6.9				2.9	3.5	5,3
			¾"	195	68			95	100	7.7	2.7	3.7	3.9	5,7	12.5			
			1"	215						8.5				6,8	15.0			
AV-4	Screwed Rc, NPT	½"	0,1 – 0,97	1.5 – 140	150	302	110	155	60	65	4.3	6.1	2.4	2.6	Cast Iron FC250	2,4	5.3	
¾"		120					65		4.7		2.6		2,5			5.5		
AV-8		70					2.8		2,7		5.9							